


# (F7) LL-EVO 4-Room, 1-Zone, Occupancy, 1-Daylight



LightLEEDer EVO 4-Zone panel with 4-remotly mounted R20D relays  
Daylight Sensor w/ Independent zone settings, Motion sensor inputs for up to 4 independent zones or local hardwire switch. Optional Plug-load relay. Local LightSync output for Multi-Zone Dimmer station (MZD) with raise/lower press-n-hold dimming, supports from 1 to 8 LightSync input devices. Optional PC3-D3 & PC4-D4 as remote mount LS-PSC-IN (LS:08, 09)

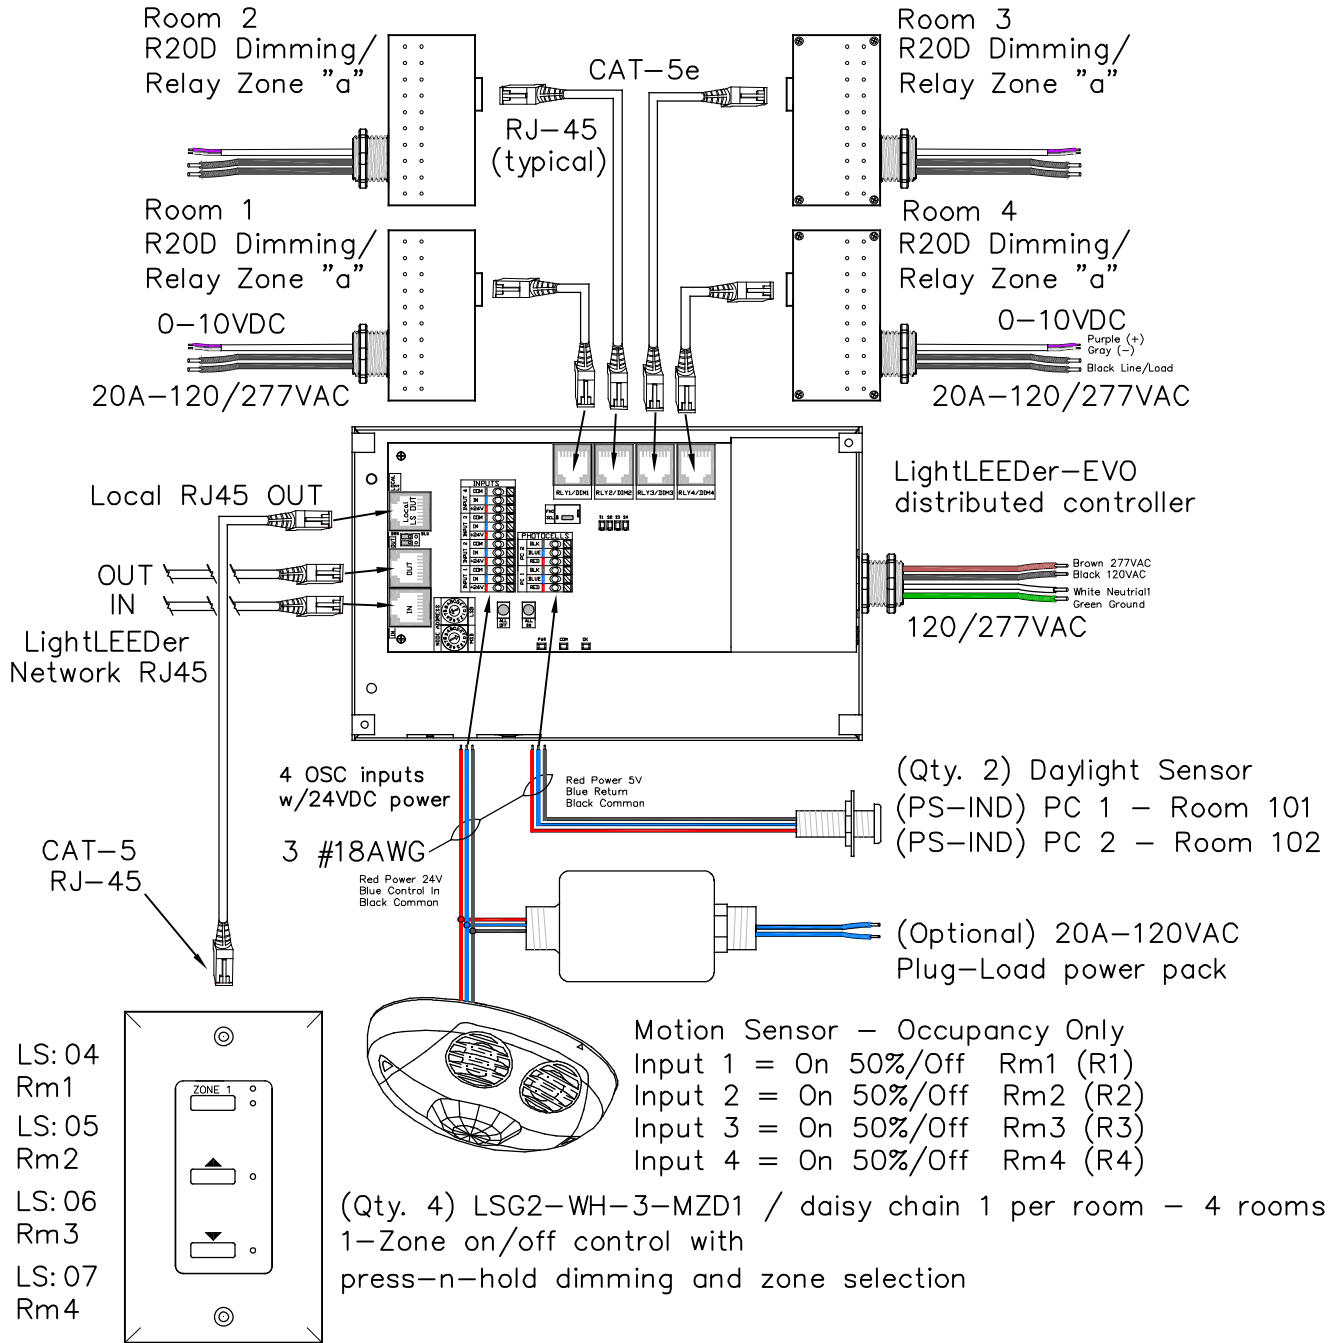

INTELLIGENT LIGHTING  
CONTROLS, INC.  
5229 Edina Industrial Boulevard  
Minneapolis, Minnesota 55439  
Ph: 952.829.1900 Fax: 952.829.1901  
1.800.922.8004  
www.ilc-usa.com

Project:

(F7) LL-EVO Lighting Application Sheet  
4-Room, 1-Zone, Occupancy,  
1-Daylight Zone per room  
LightLEEDer EVO Distributed Controller

SHEET INFORMATION

DATE: 9-20-2017

SCALE: NONE

DRAWN BY: JM&BE

GO#

---

Sheet:

F7-EVO