
(F8) LL-EVO 4-Room, 1-Zone, Vacancy, 1-Daylight

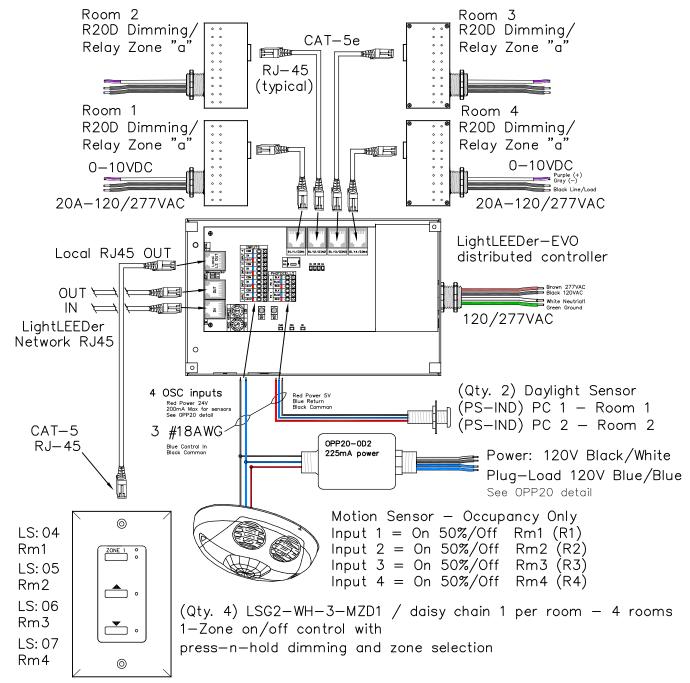

LightLEEDer EVO 4—Zone panel with 4—remotly mounted R20D relays Daylight Sensor w/ Independent zone settings, Motion sensor inputs for up to 4 independent zones or local hardwire switch. Optional Plug—load relay. Local LightSync output for Multi—Zone Dimmer station (MZD) with raise/lower press—n—hold dimming, supports from 1 to 8 LightSync input devices. Optional PC3—D3 & PC4—D4 as remote mount LS—PSC—IN (LS:08, 09)

INTELLIGENT LIGHTING CONTROLS, INC.

Proiect:

5229 Edina Industrial Boulevard Minneapolis, Minnesota 55439 Ph: 952.829.1900 Fax: 952.829.1901 1.800.922.8004 www.ilc-usa.com (F8) LL-EVO Lighting Application Sheet 4-Room, 1-Zone, Vacancy, 1-Daylight Zone per room LightLEEDer EVO Distributed Controller

	SHEET INFORMATION	
	DATE: 2-15-2018 SCALE: NONE DRAWN BY: JM&BE	
	GO#	Sheet:
		F8-EVO