


(F8) LL-EVO 4-Room, 1-Zone, Vacancy, 1-Daylight



LightLEEDer EVO 4-Zone panel with 4-remotly mounted R20D relays
Daylight Sensor w/ Independent zone settings, Motion sensor inputs for up
to 4 independent zones or local hardwire switch. Optional Plug-load relay.
Local LightSync output for Multi-Zone Dimmer station (MZD) with raise/lower
press-n-hold dimming, supports from 1 to 8 LightSync input devices.
Optional PC3-D3 & PC4-D4 as remote mount LS-PSC-IN (LS:08, 09)

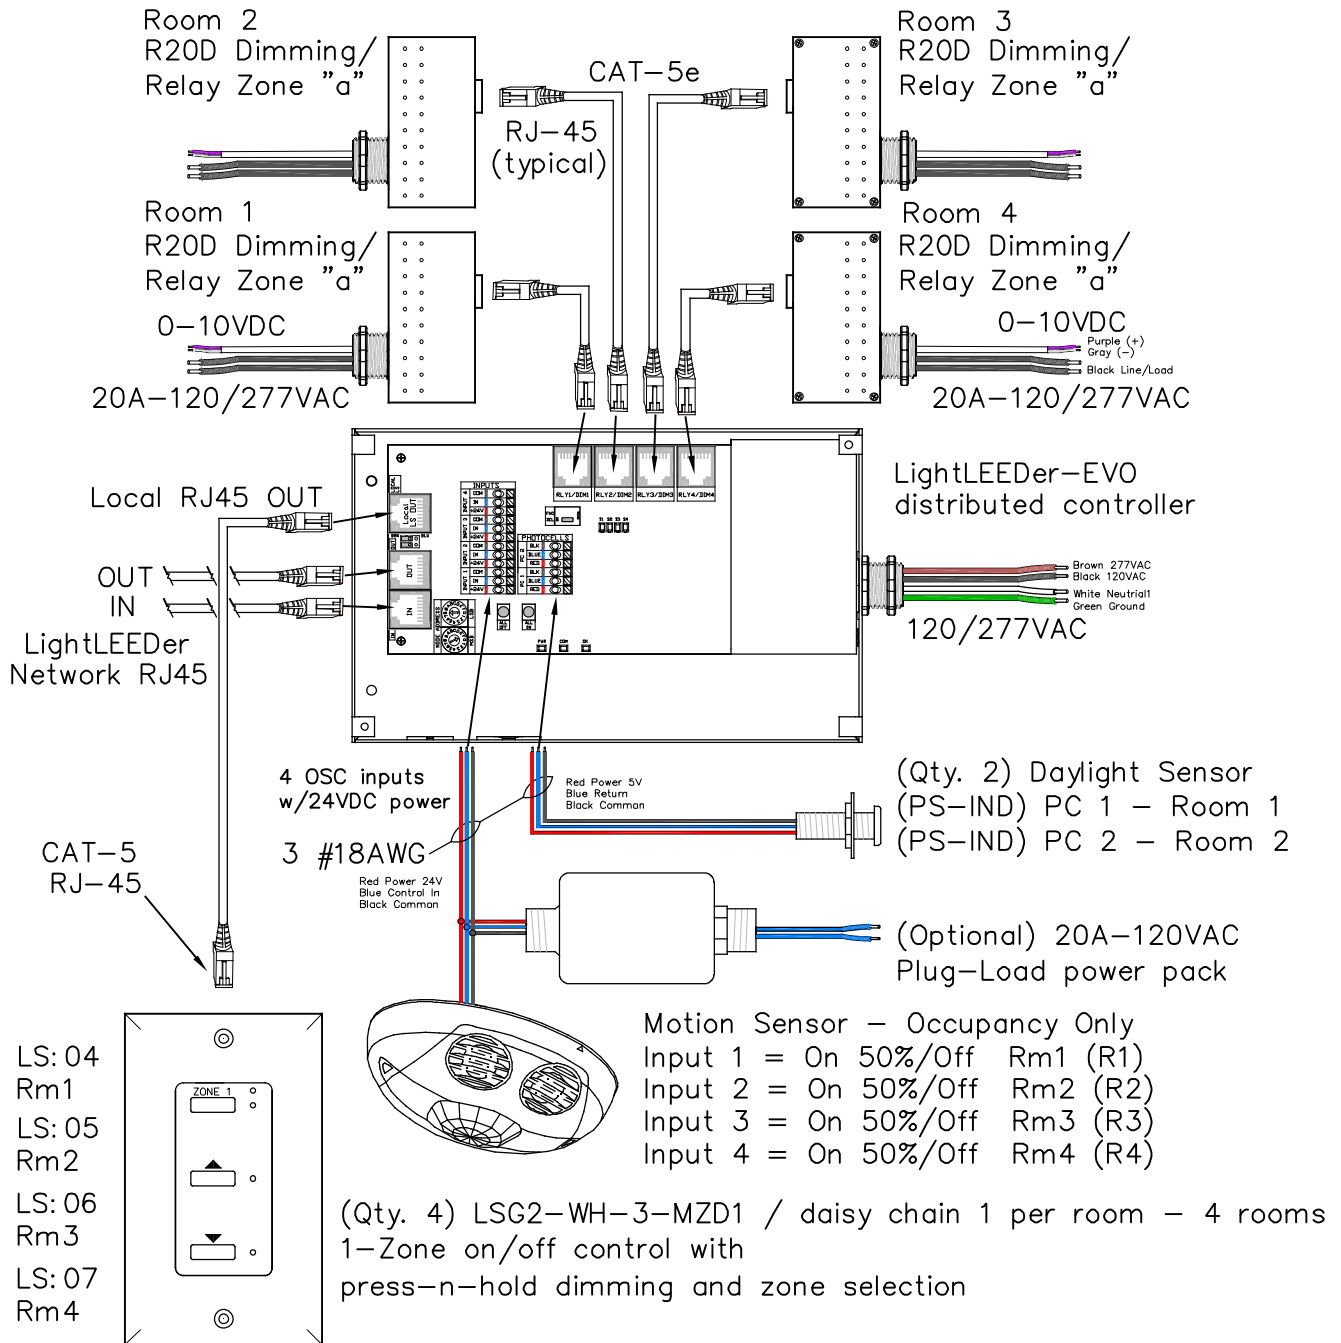

5229 Edina Industrial Boulevard
Minneapolis, Minnesota 55439
Ph: 952.829.1900 Fax: 952.829.1901
1.800.922.8004
www.ilc-usa.com

Project:

(F8) LL-EVO Lighting Application Sheet
4-Room, 1-Zone, Vacancy,
1-Daylight Zone per room
LightLEEDer EVO Distributed Controller

SHEET INFORMATION

DATE: 9-20-2017

SCALE: NONE

DRAWN BY: JM&BE

GO#

Sheet:

F8-EVO