




- Theatrical control using DMX512 control signals
- Map any DMX channel to any relay(s)
- Control of 0 - 10V dimming outputs
- Adjustable ON and OFF set points
- Settable DMX frame filter
- Settable Lock-on and Lock-off feature

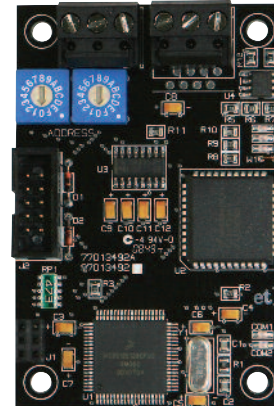

Add-Ons

Overview

The LightLEEDer DMX512 Control Module provides control of relays and 0 - 10V dimming. Any channel from the DMX controller can be mapped to control any relay or group of relays ON or OFF in the panel. DMX channels can also be programmed to control 0 - 10V dimmable ballasts or other 0 - 10V devices. The On and Off set points are adjustable from 1 to 99% and relays may be locked-on or off. An adjustable DMX frame filter is included to prevent switching if a system drops a frame.


Features

General Information:

- **USITT DMX512** interface for direct RS485 serial interface to dimming control stations
- **Made in the USA**
- **Supports** the full 512 DMX channels
- **Direct control** of any relay output in the lighting control panel
- **Map any DMX** channel to any relay output gives total flexible control
- **Adjustable** ON and OFF points
- **DMX frame filter** to prevent switching if a system drops a frame
- **Installs directly** into any panel and is automatically recognized
- **Lock-ON/OFF** feature allows locking relay output(s) to one state
- **Configured** through the keypad or with LightLEEDer Pro software



Physical

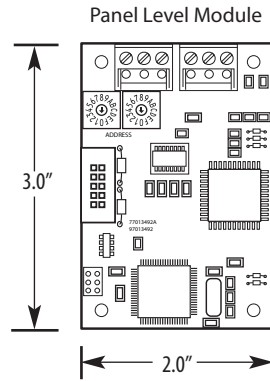

Specifications

Physical:

- Panel Level: 2" Wide X 3" High
- Removable screw connectors for data line communications

Electrical:

- Powered from the panel

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- FCC Part 15

Ordering

