



LIGHT *Sync* PSR & PS

Power Supply Repeater and
Power Supply

- Extends power and data for LightSync devices on the network
- Made in the USA
- Allows data line "T" connections
- Increased data line length to 3000 linear feet
- Adds power for up to 20 LightSync devices
- Remote mounting NEMA 1 enclosure
- Optional power supply without data extension



Overview


The LightSync Power Supply Repeater extends the data and adds power on the data line for LightSync devices. It renews data and increases the data line length by 3000 linear feet and also allows data lines "T's". Power is added for up to 20 additional LightSync devices on the data line and 3000 cumulative feet. The Power Supply Repeater and Power Supply come in a NEMA 1 enclosure with a multi-tap transformer and a high voltage divider.

Features

- **Made** in the USA
- **Data** is renewed and extended by an additional 3000 feet
- **Nodes** on the data line increase by 31 devices for data
- **Powers** up to 20 LightSync devices 3000 cumulative feet
- **Allows splitting** or "T" connections of data line
- **Enclosure** is NEMA 1 rated with high voltage divider
- **Remote mount** anywhere on the LightSync network
- **RJ45 connectors** provided for easy connection
- **Wired** from the factory, ready to install
- **Optional** power supply for data line devices without having data renewed and extended



Physical

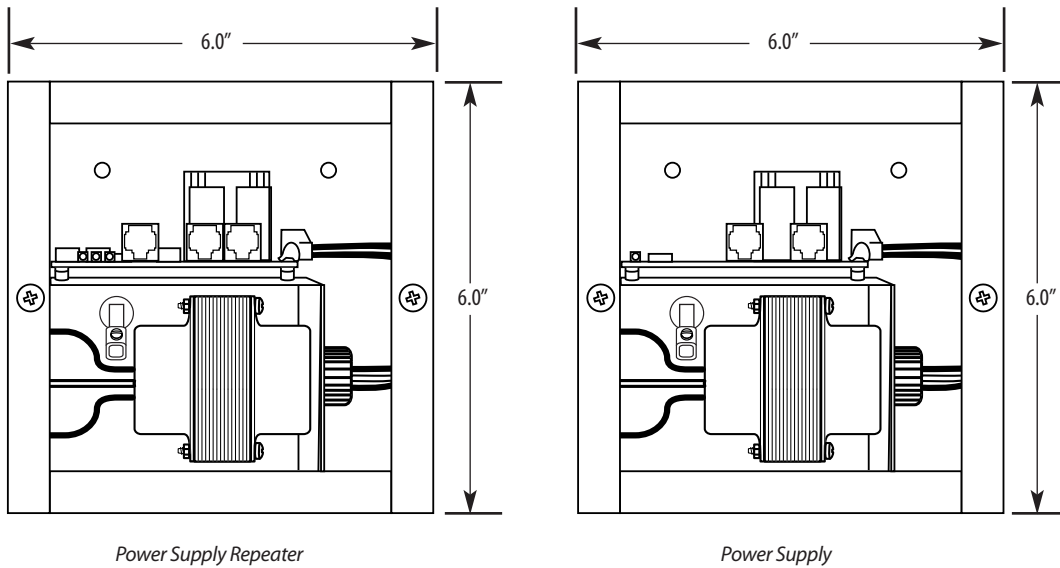

Specifications

Physical:

- Standard NEMA-1 enclosure
- 6"W x 6"H x 4"D
- Operates in any position
- High voltage barrier division
- Factory wired, ready to install
- RJ45 connectors provided for easy connection
- Feed through for main data line

Electrical:

- 120/277 VAC, optional 120/ 347 VAC

Power Supply Repeater Capacities:

- Powers up to 20 LightSync devices 3000 cumulative feet
- Extends data 3000 linear feet
- Allows "T" connections

Power Supply Capacities:

- Powers up to 20 LightSync devices 3000 cumulative feet

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- UL CUL
- FCC Part 15

Note: The LightSync Power Supply provides power ONLY to a network expansion and DOES NOT repeat data. To extend the data network beyond 3000 cumulative feet, a LightSync Power Supply Repeater is required.

Ordering

