


CIF Contact Interface Module

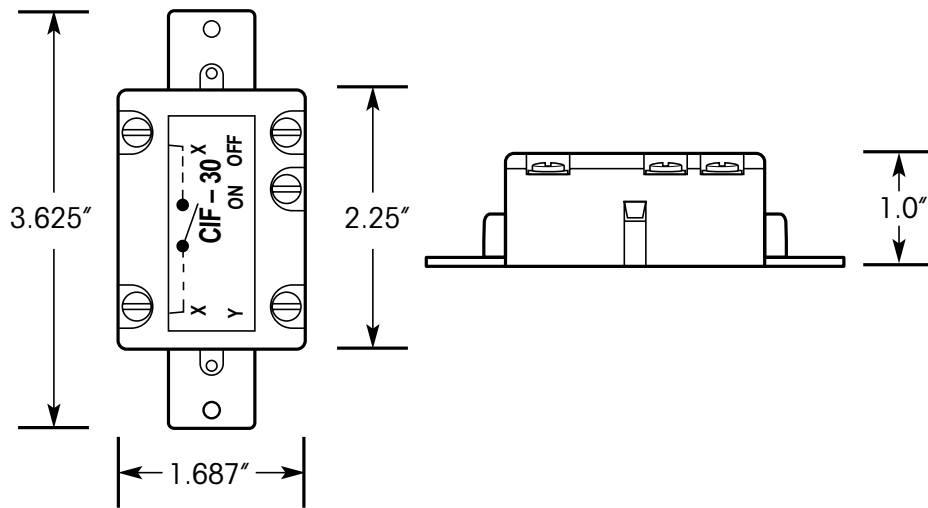

General Information

- 1 to 30 TR Relays may be controlled by maintained contact control devices or a saturated transistor
- Up to 10 CIFs may be connected in parallel and be controlled from a single point
- Can control up to 30 TRs if TRs are distributed evenly across three phases
- Can be interfaced with ILC's Interface Module (IFM) for zone control
- Can be mounted in an electrical outlet box with blank cover
- UL Listed
- Mounts in standard 4" outlet box
- Operates in any position

Physical:

- Mounts in standard 4" outlet box
- Operates in any position

Operating Environment:

- Location Interior Space
- Operating Temperature 0° to 60° C (32° to 140° F)
- Relative Humidity 10% to 95%
- Atmosphere Non-condensing, Non-explosive, Non-corrosive
- Vibration Stationary application, NEMA Level A

Certifications:

- UL
- FCC approval for commercial and residential use