



LIGHT *Master* DTMFG

Multiple Line
DTMF Telephone Control

- Use for multiple telephone line applications
- Operates on ILC LightMaster data line in network applications
- Control any relay, group of relays or preset scene from any touch-tone telephone
- As easy to use as your voice mail
- Voice prompted commands and instructions
- Simple plug-and-play installation



Overview

The LightMaster 4-line DTMF Gateway module can easily be added to any LightSync data line network application to provide multi-line Voice Prompted DTMF touch-tone telephone control. DTMF control allows any touch-tone telephone to become a lighting control switch device, and multiple line capability extends your options. Through the use of the DTMF control signals the user can command relays, groups of relays, or activate preset scenes from the convenience of any touch-tone telephone, including cellular phones. Clear voice prompts are built in to make navigating command menus easy and straightforward.

Features

Programming Options:

- Once plugged into the LightMaster data line, user has access to control via voice prompted commands. No programming required

DTMF Functions:

Remote Control and Monitoring

- Turn ON or OFF any relay or group of relays
- Activate preset scenes

Multiple Telephone Lines

- Each LightMaster 4-line DTMF Gateway processor board accepts up to 4 LMNTI Telephone Interface cards (one required per line: specify quantity when ordering)


Online Operational Instructions and Prompting

- DTMF commands and control functions are supported by true voice prompting that can guide the user through operational commands and give instructions as to the use of the system

FOR USE IN
SN EN
LIGHTMASTER NETWORKS

INTELLIGENT LIGHTING
CONTROLS, INC.

5229 Edina Industrial Boulevard
Minneapolis, Minnesota 55439
Phone 952 829 1900
FAX 952 829 1901
1-800-922-8004
www.ilc-usa.com

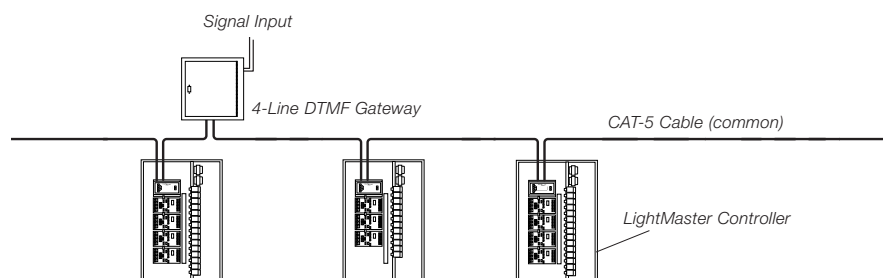


4-Line DTMF Gateway Connection to LightMaster network



LIGHT *Master* DTMFG

Multiple Line
DTMF Telephone Control

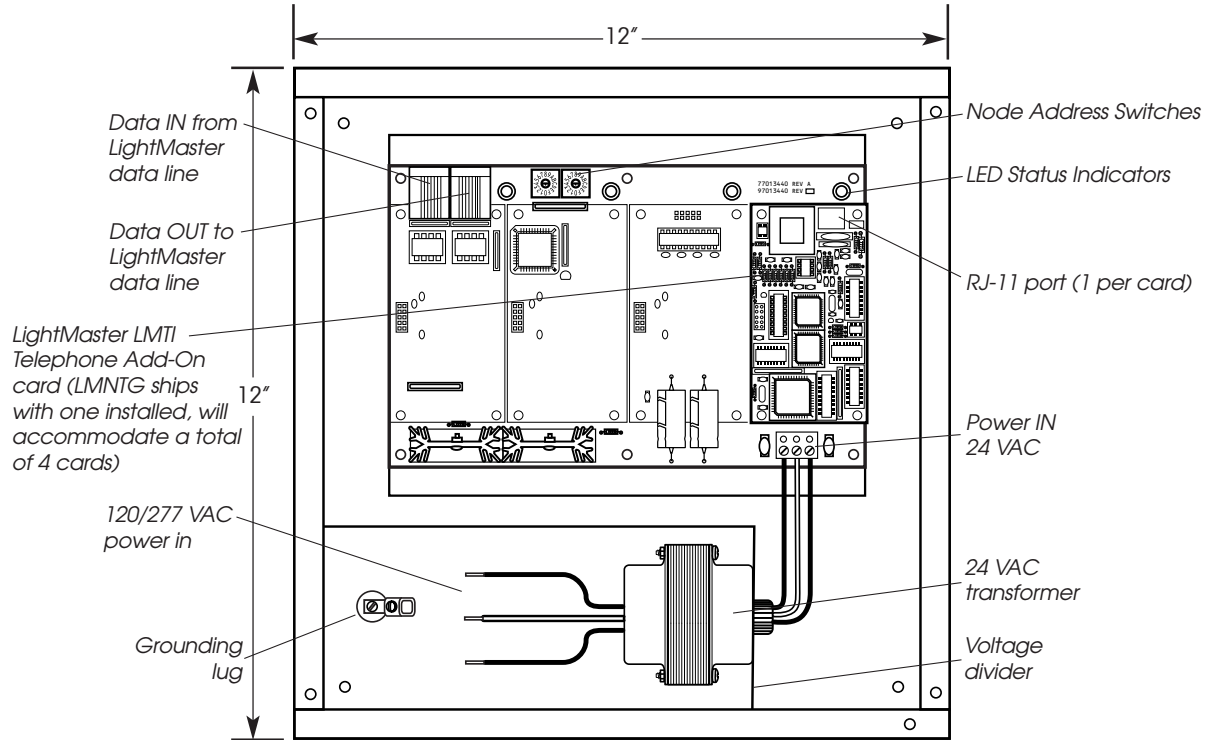

LightMaster 4-line DTMF Gateway (shown in NEMA-type enclosure with transformer)

Specifications

Physical:

- Mounted in standard NEMA 12" x 12" x 4" enclosure, contact factory for custom configurations

Operating Environment:

- Location Interior space
- Operating Temperature 0° to 50° C (32° to 112° F)
- Relative Humidity 10% to 90% Non-Condensing

Certifications:

- UL

Configuration:

- Soft configuration

NOTE: requires standard analog telephone line for operation

How to Order

Ordering a **LightMaster 4-line DTMF Gateway**
Order No. LMNG-T-03 (sample)

LMNG - T - 01

(LMNG-T ships with one LMTI card installed, specify number of cards (02, 03 or 04) if more than one are required)

INTELLIGENT LIGHTING
CONTROLS, INC.

5229 Edina Industrial Boulevard
Minneapolis, Minnesota 55439
Phone 952 829 1900
FAX 952 829 1901
1-800-922-8004
www.ilc-usa.com