



Overview

The LightLEEDer RJ-45 Terminal adapter can be used with the LightLEEDer EVO-INT-2, -4, -8 panels for termination to a hardwire photo sensor or occupancy sensor. The Installer can run a CAT-5 cable for the photo sensor or occupancy sensors at the same time as they run CAT-5 for the LSG3 switches to save time and expense. Then place the LLRJ-45T at the end of each sensor run for easy termination.



Features

- Made in the USA, meets BABA Requirements
- CAT-5 cable RJ-45 terminator
- Push to connect terminal with release button
- Low profile size
- Plug and Play operation

Warranty

Five-Year limited warranty

Ordering




Series:
LightLEEDer
RJ-45 Terminal

All ILC product configurations are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

LightLEEDer

RJ-45 Terminal

Physical

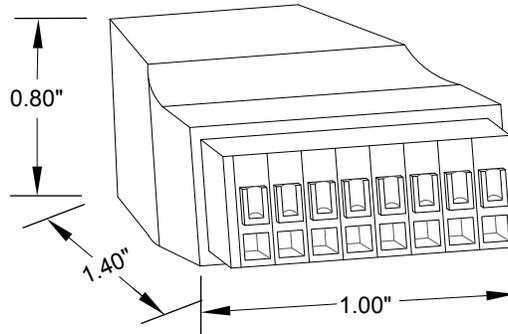

Specifications

Physical:

- 1.40" Long x 1.00" Wide x 0.80" Tall
- RJ-45 female connector
- 8 Terminal Push to terminate connector with push button release
- No soldering or crimping required
- Molded solid construction
- 22 to 16AWG stranded wire supported

Domestic Preferences:

Domestic preference options to meet BAA or BABA requirements. BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.