Catalog Number: Date: Project:



www.ilc-usa.com 952.829.1900

LightSync Digital

Data Line Disable Key Switch Station





Overview

The LightSync Digital Data Line Disable Key Switch Station provides an extra level of security by disabling all LightSync devices down from the disable switch. Ideal for areas with switches that require control functions to be limited or locked out. Switch stations have a high quality 5-tumbler key switch and status LED. Key Switches stations are available in stainless steel.



Features


- . Made in the USA, meets BABA Requirements
- Digital CAT-5 Ready
- Disables LightSync devices on the data line
- Feed-through allows for normal data line communication
- Key Switch maintained type with removable key
- Secure 5-tumbler high quality switches
- Status LED indicates disable state

- Key Switch Stations are available in stainless steel
- Mounts in a standard single gang box
- Mount anywhere on the LightSync network
- Self-powered from the network

Warranty

Five-Year limited warranty

Ordering

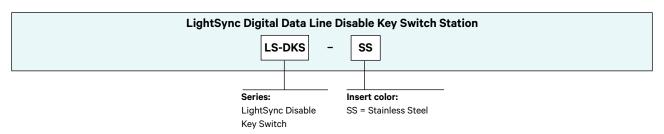

All ILC product configurations are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the <u>DOMESTIC PREFERENCES</u> website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.






www.ilc-usa.com 952.829.1900

LightSync Digital


Data Line Disable Key Switch Station

Physical









Specifications

Physical:

- · Standard single gang mounting
- Data in, data out, and data disable out ports
- RJ45 connectors provided for easy connection
- · Mounting screws provided
- Laser engraving up to 10 characters available
- Available in stainless steel

Switches:

 Maintained SPST key removable in "on" or "off" position

Electrical:

• Powered from the panel or LightSync network

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- · Vibration: Stationary

Domestic Preferences:

Domestic preference options to meet BAA or BABA requirements. BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the <u>DOMESTIC PREFERENCES</u> website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Certifications and Approvals:

- UL
- FCC Part 15

